CAMPANA PARA CAPTURA DE FLUJO DE AIRE

Barra de apoyo

- Utilizado para soportar la cubierta de tela de nailon

Manija

- La varilla de elevación se puede ajustar a la posición adecuada de la salida de aire que se va a medir girando la manija,

Hélice fija

- Para fijarlo, apriete el tornillo de fijación después de ajustar el anemómetro.

Interfaz externa

- Utilizado para conectar un chasis conveniente

SKU: B-01-12-12-001400 | **Categorías:** Campana de extracción, gabinete de flujo laminar, gabinete de bioseguridad, Contador de partículas |

DESCRIPCIÓN DEL PRODUCTO

Especificaciones

- Marco
- Barra de soporte
- Cubierta de tela de nailon
- Arregló de perilla
- Panel de visualización
- Interruptor de encendido
- Manija
- Ranura del borde de la boca de la base
- Base

ESPECIFICACIONES TÉCNICAS

COTECNO

Air capture hood/balometer

Stable

Efficient

The pitot tube principle

Multipoint, multiple automatic measurement

Product introduction

Product analysis

Suppot rod

Used to support nylon cloth cover

Shake the handle

The lifting rod can be adjusted to the appropriate positionof the air outlet to be measured by shaking the handle.

Fixed helix

Forfxing,tigten thefixing screw after adjusting the anemometer.

External interface

Used to connect convenient chassis.

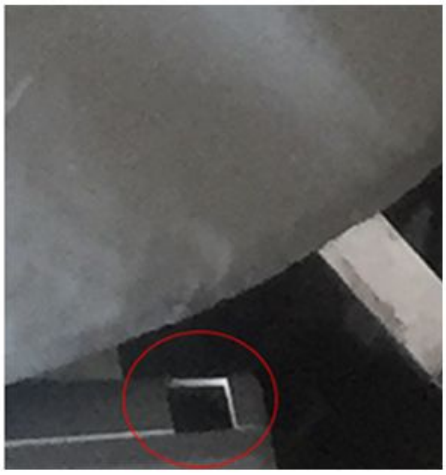

INFORMACIÓN ADICIONAL

2021 Material	Nailon

COTECNO