
Importadora Gyb Limitada
Padre orellana 1476
Santiago CL13101 Chile

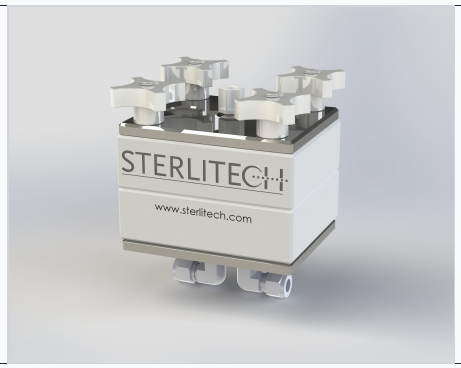

Celdas de flujo cruzado CF016

Código: 1160296 / 1160281 / 1160310 / 1160070

Marca: STERLITECH

Ver producto en Cotecno | Solicitar cotización

Detalle | Especificaciones | Aplicaciones

Detalle

Celdas de flujo cruzado CF016

Características y ventajas de las celdas CF016:

Acepta cupones de membrana de lámina plana polimérica

CARACTERÍSTICAS PRINCIPALES

- Imita condiciones de flujo laminar o turbulento
- Proporciona datos de rendimiento rápidos y precisos
- Ofrece un uso juicioso de la membrana con un área activa pequeña

Especificaciones técnicas

Especificación	1160070	1160281	1160296	1160310
Tipo de material	Stainless Steel	PTFE	Acetal	Acrylic
Area de membrana activa	20.6 cm 2 (3.2 in 2)	20.6 cm 2 (3.2 in 2)	20.6 cm 2 (3.2 in 2)	20.6 cm 2 (3.2 in 2)
Volumen retenido	13 mL (0.44 oz)	13 mL (0.44 oz)	13 mL (0.44 oz)	13 mL (0.44 oz)
Conexiones	Feed: 1 / 4 in FNPT (base of cell) | Concentrate 1 / 4 in FNPT (base of cell) | Filtrate: 1 / 8 in FNPT (top of cell)	Feed: 1 / 4 in FNPT (base of cell) | Concentrate 1 / 4 in FNPT (base of cell) | Filtrate: 1 / 8 in FNPT (top of cell)	Feed: 1 / 4 in FNPT (base of cell) | Concentrate 1 / 4 in FNPT (base of cell) | Filtrate: 1 / 8 in FNPT (top of cell)	Feed: 1 / 4 in FNPT (base of cell) | Concentrate 1 / 4 in FNPT (base of cell) | Filtrate: 1 / 8 in FNPT (top of cell)
Dimensiones exteriores	12.7 x 10 x 8.3 cm (5 x 4 x 3.25 in)	12.7 x 10 x 8.3 cm (5 x 4 x 3.25 in)	12.7 x 10 x 8.3 cm (5 x 4 x 3.25 in)	12.7 x 10 x 8.3 cm (5 x 4 x 3.25 in)
Dimensiones	4.52 x 4.52 cm (1.78 x 1.78 in)	4.52 x 4.52 cm (1.78 x 1.78 in)	4.52 x 4.52 cm (1.78 x 1.78 in)	4.52 x 4.52 cm (1.78 x 1.78 in)
Profundidad de ranura	0.23 cm (0.09 in)	0.23 cm (0.09 in)	0.23 cm (0.09 in)	0.23 cm (0.09 in)
Ancho de ranura	39 mm (1.54 in)	39 mm (1.54 in)	39 mm (1.54 in)	39 mm (1.54 in)
Material	316 Stainless Steel	Virgin PTFE	Acetal (Delrin)	Acrylic
Torque maximo de pernos	—	15	60	45
Torque maximo de fittings	25	25	25	25
Presion maxima	69 bar (1000 psig)	27.6 bar (400 psig)	69 bar (1000 psig)	27.6 bar (400 psig)
max temperatura	150°C (302°F)	260°C (500°F)	82°C (180°F)	88°C (190°F)

Importadora Gyb Limitada
Padre orellana 1476
Santiago CL13101 Chile

Siguiente paso: ver producto en Cotecno | solicitar cotización